


SPECIFICATION:

Furnish and install roof vent flashing with 25 mil. aluminum base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. *(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)*

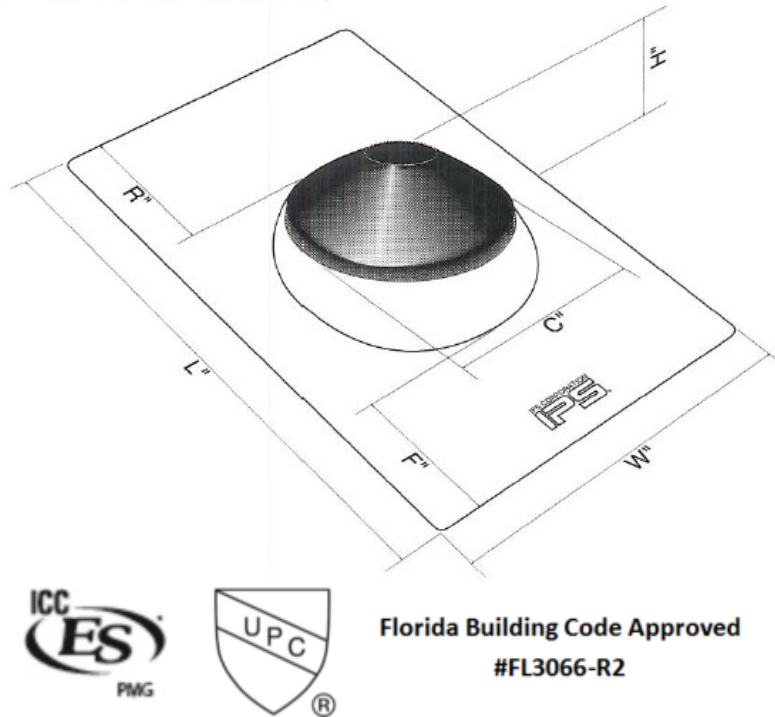

Product Code	Model	Vent Size	Dim. W	Dim. L	Dim. R	Dim. F	Dim. C	Dim. H
81900	AB1	1 ¼" - 1 ½"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ¼"
81905	AB2	2"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ¼"
81910	AB3	3"	10 ¾"	14 ½"	2 ⅝"	2 ⅜"	5 ½"	2"
81915	AB4	4"	12"	16"	3 ¾"	2 ¾"	6 ½"	2 ⅛"
81916	AB5	½", ¾", 1"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ⅝"
81920	AB118	1 ¼" - 1 ½"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ¼"
81925	AB218	2"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ¼"
81930	AB318	3"	18"	18"	5 ⅜"	5 ⅞"	5 ½"	2"
81935	AB418	4"	18"	18"	4 ¾"	3 ¾"	6 ½"	2 ⅛"
81937	AB518	½", ¾", 1"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ⅝"